


Parts Leveler EcoMaster® 30

for sheet metal parts from 0.3 mm up to 5 mm thickness

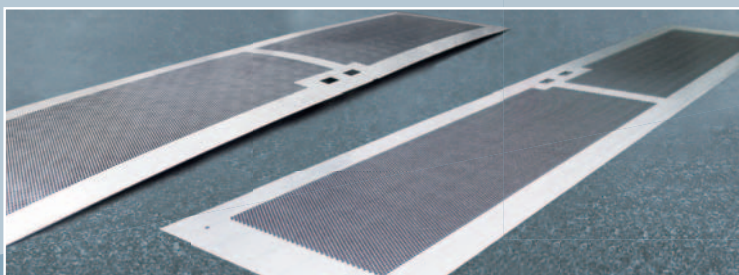

▲
before

▲
after

Machine type	EcoMaster® 3030	EcoMaster® 3050	EcoMaster® 3080	EcoMaster® 30110	EcoMaster® 30130
Parts thickness (mm)	0.3 – 5.0	0.3 – 5.0	0.3 – 5.0	0.3 – 5.0	0.3 – 5.0
Max. passage width (mm)	300	500	800	1,100	1,300
Min. parts length (mm)	65	65	65	65	65
Quick-change system for leveling rollers	standard	standard	standard	standard	standard
Setting	optional	optional	optional	optional	optional
CE-Certification	standard	standard	standard	standard	standard
Dimensions (mm) (length x width x height)	2,000 x 1,700 x 2,000	2,000 x 1,800 x 2,000	2,000 x 2,000 x 2,000	2,000 x 2,200 x 2,000	2,000 x 2,700 x 2,000
Total weight (kg)	3,500	3,800	4,000	5,000	6,000

ARKU Maschinenbau GmbH
 Siemensstr. 11, 76532 Baden-Baden, Germany
 Phone: +49 72 21 / 50 09-0
 Fax: +49 72 21 / 50 09-11
 info@arku.com, www.arku.com

ARKU
 EXPERTS IN LEVELING

EcoMaster 30






◀ Unique – The ARKU quick-change system for leveling rollers offers the advantage of cleaning and changing the leveling rollers in a few minutes.


EcoMaster® – constant leveling results for automotive,

laser job shops,

or aerospace.

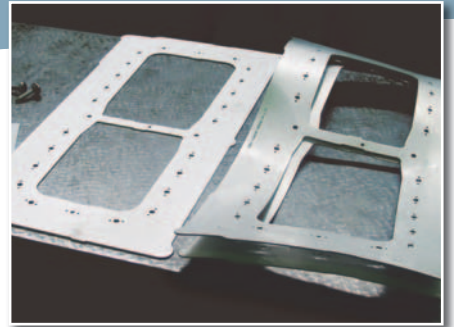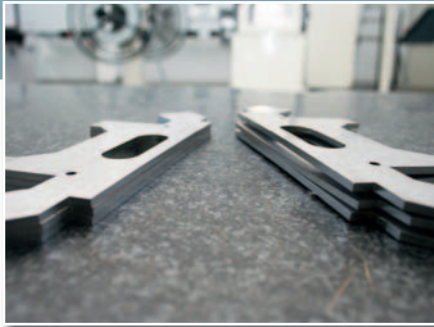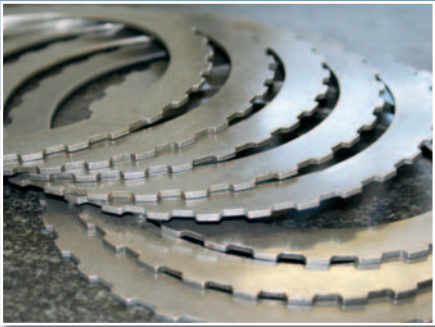

Leveling performance diagram of the EcoMaster® 30

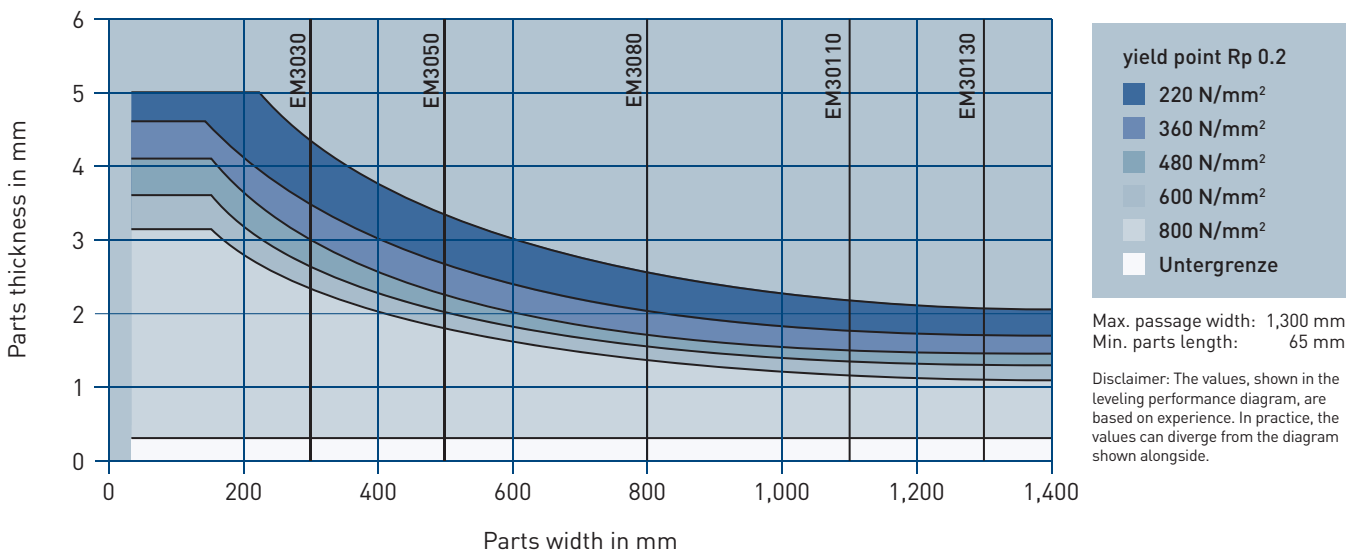

yield point Rp 0.2

- 220 N/mm²
- 360 N/mm²
- 480 N/mm²
- 600 N/mm²
- 800 N/mm²
- Untergrenze

Max. passage width: 1,300 mm
Min. parts length: 65 mm

Disclaimer: The values, shown in the leveling performance diagram, are based on experience. In practice, the values can diverge from the diagram shown alongside.